

LP-SERIEN

6-9 YEAR GENERAL PURPOSE




LP FÖRDELAR & OMRÅDEN

- Lång livlängd vid standby applikationer
- 6-9 år design life
- Back-up system (UPS, EPS, LARM, mm)
- Underhållsfri med syrgasrekombinationsteknologi
- High Performance AGM



GENERAL
PURPOSE

AGM
6-9 år

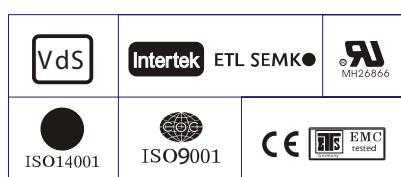


LP MODELLER

Art. nummer	Spänning (V)	Ah (C20)	Mått LxBxH	Terminal
LP12-0.8	12V	0,8	96 x 25 x 62	Quick
LP12-1.2	12V	1,4	96 x 43 x 52	T1
LP12-2.3	12V	2,3	178 x 35 x 60	T1
LP12-2.9	12V	2,9	79 x 55 x 106	T1
LP12-3.2	12V	3,2	134 x 67 x 60,5	T1
LP12-4.0L	12V	4,0	195 x 70 x 47	T1
LP12-4.5	12V	4,5	90 x 70 x 101	T1
LP12-5.4	12V	5,4	90 x 70 x 101	T1
LP12-7.2	12V	7,2	151 x 65 x 94	T1
LP12-7.2T	12V	7,2	151 x 65 x 94	T2
LP12-8.5	12V	8,6	151 x 65 x 94	T2
LP12-12	12V	12	151 x 98 x 95	T2
LP12-14	12V	14	151 x 98 x 95	T2
LP12-18	12V	18	181 x 77 x 167	T3
LP12-20	12V	20	181 x 77 x 167	T3
LP12-24	12V	24	177 x 166 x 125	T3
LP12-28	12V	28	177 x 166 x 125	T3
LP12-28H	12V	28	165 x 125 x 175	T3
LP12-33	12V	33,1	195 x 130 x 155	T5
LP12-38	12V	39,5	197 x 165 x 170	T6
LP12-45	12V	46,8	197 x 165 x 170	T6
LP12-50	12V	52	257 x 132 x 200	T6
LP12-55	12V	57,2	229 x 138 x 205	T6



LP EXEMPEL DIMENSIONER

Unit: mm [inches]

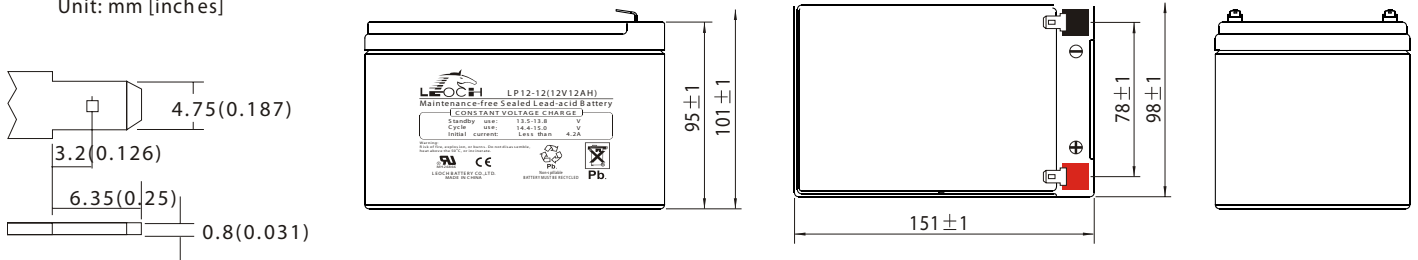



URLADDNINGSKARAKTÄRISTIK

LADDNINGSKARAKTÄRISTIK

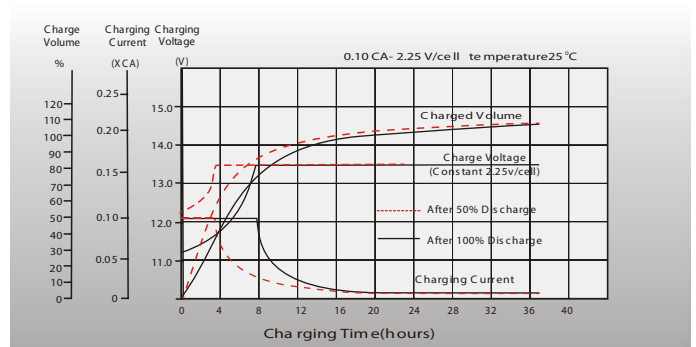
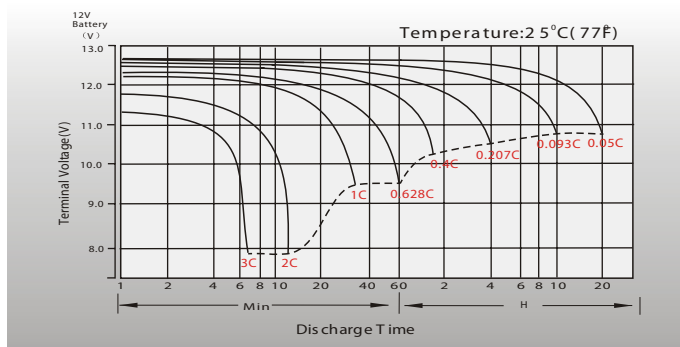


TEMPERATUR vs KAPACITET

TEMPERATURPÅVERKAN

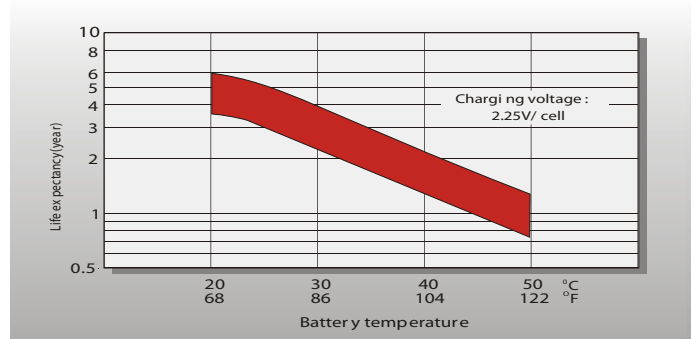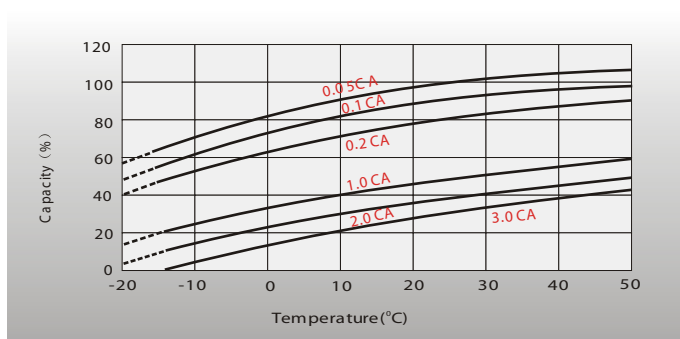

LÅNGTIDSFÖRVARING vs SJÄVLADDNING

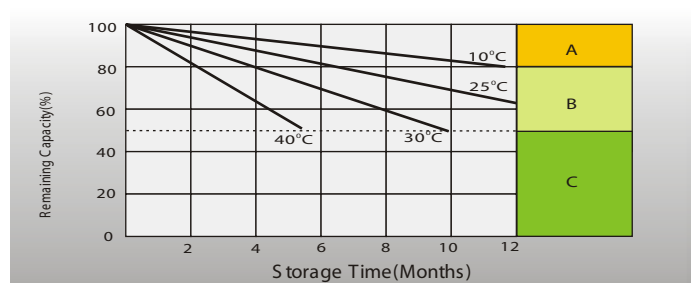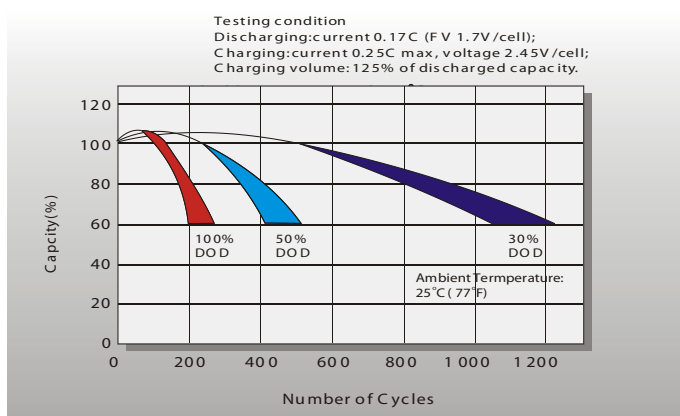

- A** No supplementary charging required (Carry out supplementary charging before use if 100% capacity is required.)
- B** Supplementary charging required before use. Optional charging ways as below:
 1. Charged for a above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for a above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8 ~10 hours at limited current 0.05 CA.
- C** Supplementary charging may often fail to recover the capacity. The battery should never be left standing until this is reached.