


LPX-SERIEN

UPS HIGH RATE BATTERIER



LP FÖRDELAR & OMRÅDEN

- Anpassad UPS HIGH RATE
- 12 år+ design life
- Back-up system (UPS, EPS, LARM, mm)
- Underhållsfri med syrgasrekombinationsteknologi
- High Rate UPS AGM

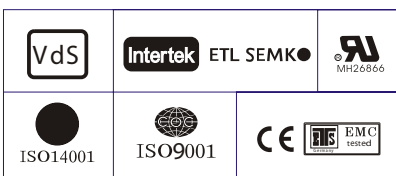

HIGH
RATE


AGM
12 år+

LP MODELLER

Art. nummer	Spänning (V)	Watt (15min)	Mått LxBxH	Terminal
LPX12-2,2	12V	7,89	178x35x60	T1
LPX12-3,2	12V	11,5	134x67x60	T1
LPX12-5,4	12V	19,4	90x70x101	T1
LPX12-6,0	12V	21,5	151x65x94,5	T1
LPX12-6,5	12V	23,3	151x53x93	T1
LPX12-7,0	12V	25,1	151x65x94,5	T1
LPX12-7,6	12V	27,3	151x65x94,5	T2
LPX12-12	12V	43	151x98x95	T2
LPX12-17	12V	61	181,5x77x167	T3
LPX12-18	12V	64,6	181,5x77x167	T3
LPX12-20	12V	71,7	181,5x77x167	T3
LPX12-24	12V	86,1	166,5x175x125	T3
LPX12-35	12V	125,6	197x165x169	T6
LPX12-38	12V	133	197x165x170	T6
LPX12-65	12V	227,5	348x167x178	T6
LPX12-72	12V	252	259x168x208	T6
LPX12-100	12V	350	330x173x212	T6
LPX12-120	12V	420	410x177x225	T11
LPX12-150	12V	524,9	485x170x242	T11
LPX12-200	12V	700	522x240x218	T11
LPX12-250	12V	885	522x268x220	T11
LPX6-100	6V	350	195x170x206	T6
LPX6-150	6V	525	260x180x247	T11
LPX6-200	6V	700	322x178x228	T11



EXEMPEL DIMENSIONER

Unit: mm [inches]

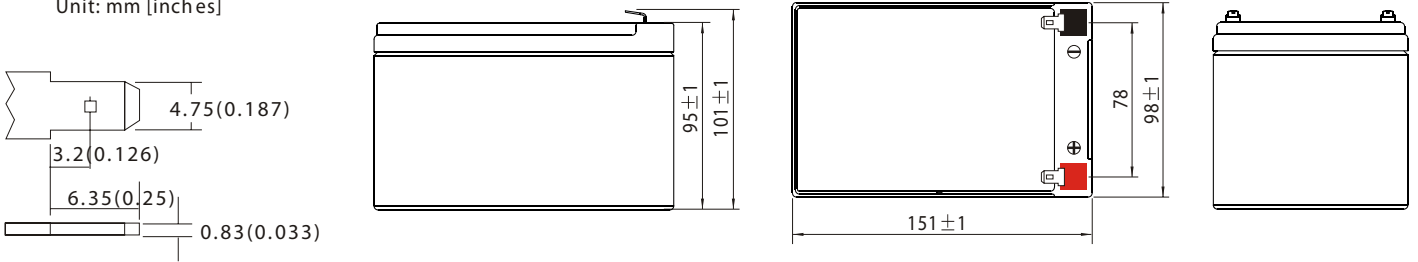



URLADDNINGSKARAKTÄRISTIK

LADDNINGSKARAKTÄRISTIK

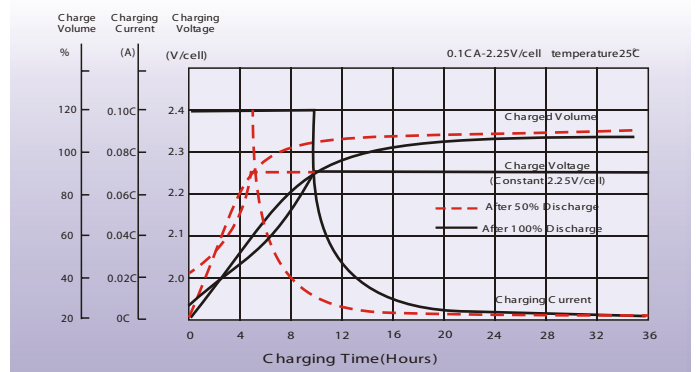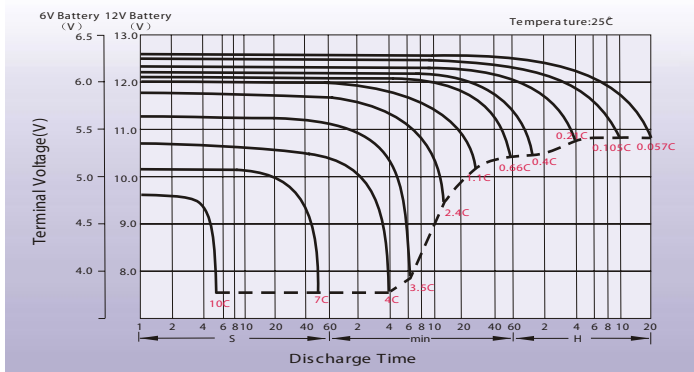


TEMPERATUR vs KAPACITET

TEMPERATURPÅVERKAN

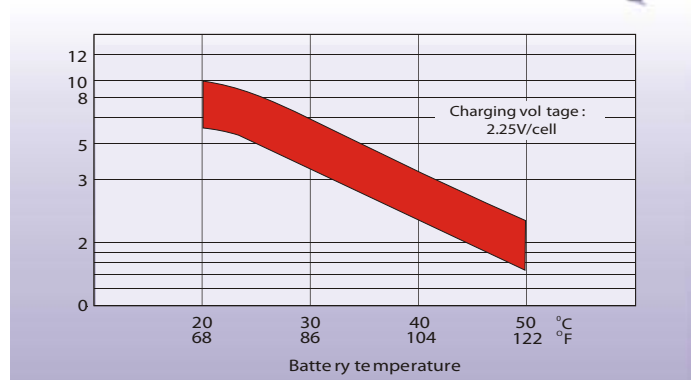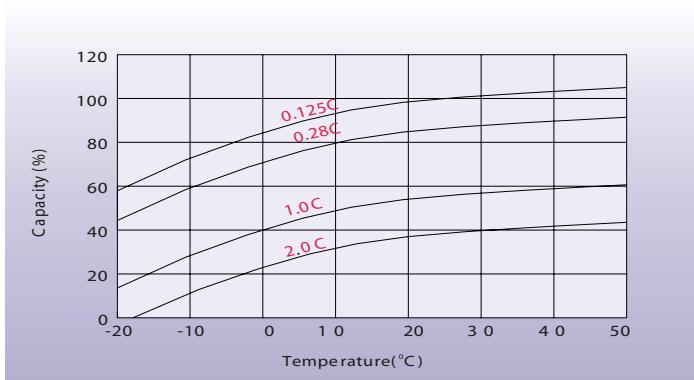

LÅNGTIDSFÖRVARING vs SJÄVLADDNING

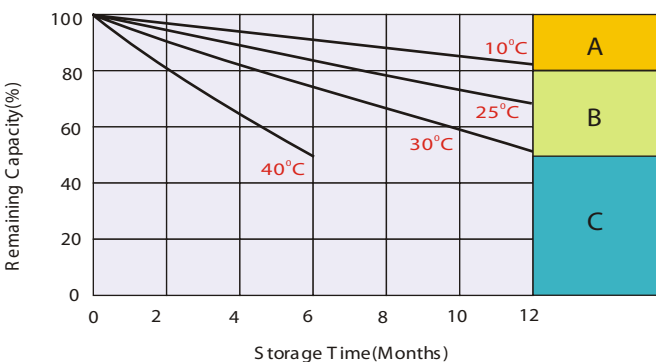

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
1.Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2.Charged for above 20 hours at limited current 0.25 CA and constant voltage 2.45V/cell.
3.Charged for 8~10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.