


# LPX-SERIEN

## UPS HIGH RATE BATTERIER

### LPX FÖRDELAR & OMRÅDEN










- Anpassad UPS HIGH RATE
- 12 år+ design life
- Back-up system (UPS, EPS, LARM, mm)
- Underhållsfri med syrgasrekombinationsteknologi
- High Rate UPS AGM

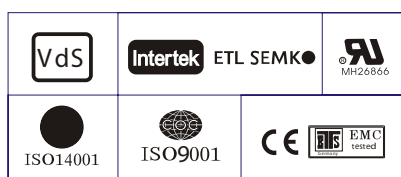

### LPX MODELLER

Art. nummer		Spänning (V)	Watt (15min)	Mått LxBxH	Terminal
LPX12-2,2	52 304 95	12V	7,89	178x35x60	T1
LPX12-3,2	52 304 96	12V	11,5	134x67x60	T1
LPX12-5,4	52 304 97	12V	19,4	90x70x101	T1
LPX12-6,0	52 304 98	12V	21,5	151x65x94,5	T1
LPX12-7,0	52 304 99	12V	25,1	151x65x94,5	T1
LPX12-7,6	52 305 01	12V	27,3	151x65x94,5	T2
LPX12-12	52 305 02	12V	43	151x98x95	T2
LPX12-17	52 305 04	12V	61	181,5x77x167	T3
LPX12-18	52 305 05	12V	64,6	181,5x77x167	T3
LPX12-20	52 305 07	12V	71,7	181,5x77x167	T3
LPX12-24	52 305 08	12V	86,1	166,5x175x125	T3
LPX12-35	52 305 10	12V	125,6	197x165x169	T6
LPX12-38	52 305 11	12V	133	197x165x170	T6
LPX12-65	52 305 12	12V	227,5	348x167x178	T6
LPX12-72	52 305 14	12V	252	259x168x208	T6
LPX12-100	52 305 16	12V	350	330x173x212	T6
LPX12-120	52 305 17	12V	420	410x177x225	T11
LPX12-150	52 305 19	12V	524,9	485x170x242	T11
LPX12-200	52 305 20	12V	700	522x240x218	T11
LPX12-250	52 305 22	12V	885	522x268x220	T11
LPX6-200	52 305 23	6V	700	322x178x228	T11

Unit: mm [inches]

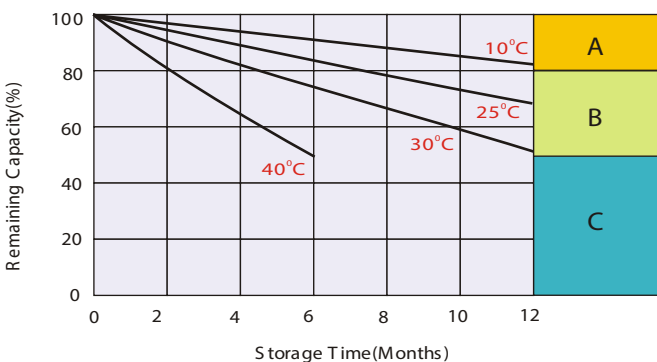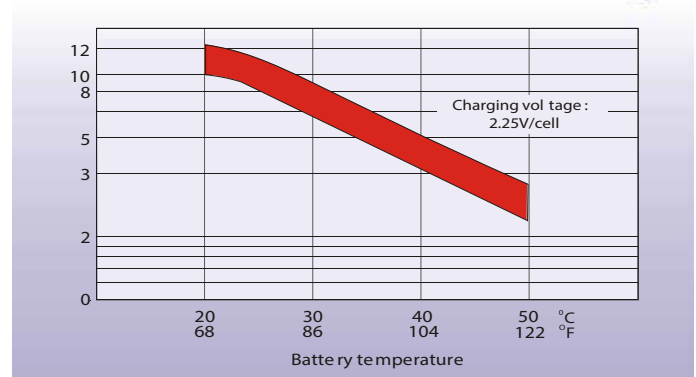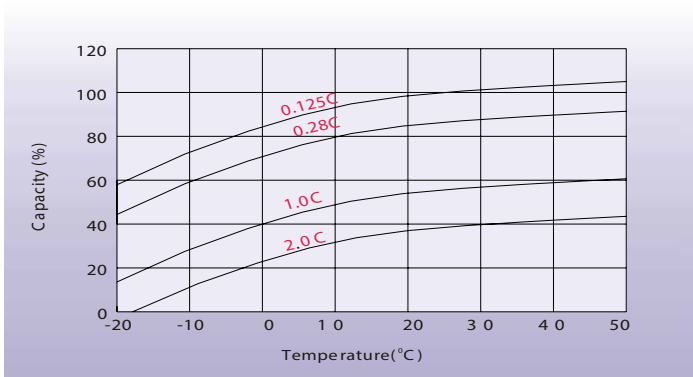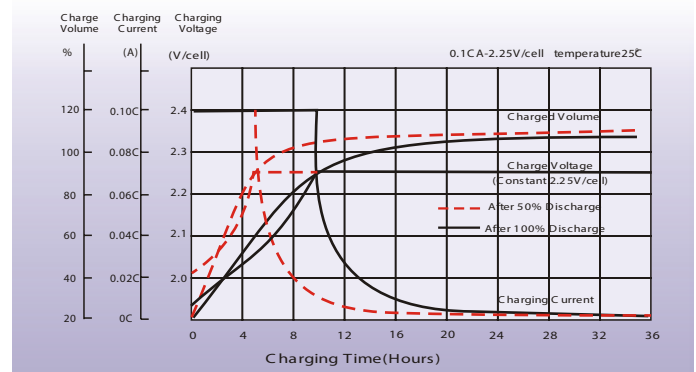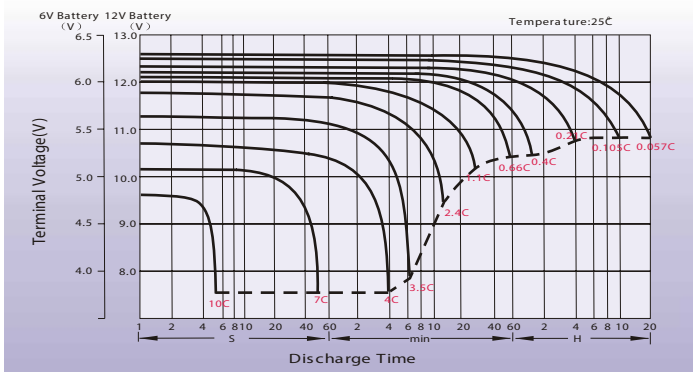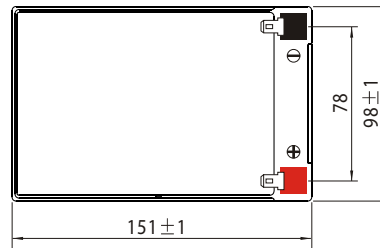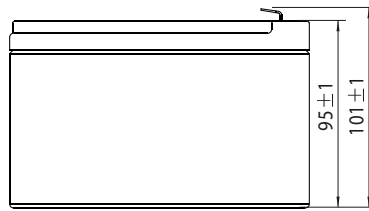

- A** No supplementary charger required  
(Carry out supplementary charge before reuse if 100% capacity is required.)
- B** Supplementary charger required before use. Optional charging ways as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25 CA and constant voltage 2.45V/cell.  
3. Charged for 8~10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.  
The battery should never be left standing till this is reached.